



DC COMPONENTS CO., LTD.
RECTIFIER SPECIALISTS

1U1
THRU
1U8

TECHNICAL SPECIFICATIONS OF ULTRA FAST RECTIFIER

VOLTAGE RANGE - 50 to 1000 Volts

CURRENT - 1.0 Ampere

FEATURES

- * Low power loss, high efficiency
- * Low leakage
- * Low forward voltage
- * High current capability
- * High speed switching
- * High surge capability
- * High reliability

MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: UL 94V-0 rated flame retardant
- * Lead: MIL-STD-202E, Method 208 guaranteed
- * Polarity: Color band denotes cathode end
- * Mounting position: Any
- * Weight: 0.19 gram approx.

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.



R-1

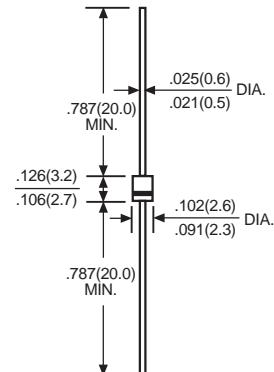

Dimensions in inches and (millimeters)







	SYMBOL	1U1	1U2	1U3	1U4	1U5	1U6	1U7	1U8	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	300	400	600	800	1000	Volts
Maximum RMS Voltage	V _{RMS}	35	70	140	210	280	420	560	700	Volts
Maximum DC Blocking Voltage	V _D	50	100	200	300	400	600	800	1000	Volts
Maximum Average Forward Rectified Current at TA = 55°C	I _o					1.0				Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}				25					Amps
Maximum Instantaneous Forward Voltage at 1.0A DC	V _F		1.0		1.3		1.7			Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage	I _R	@ T _A = 25°C			10					μAmps
		@ T _A = 100°C			500					
Maximum Full Load Reverse Current Average, Full Cycle .375"(9.5mm) lead length at T _L = 55°C					150					
Maximum Reverse Recovery Time (Note 1)	t _{rr}		50			75				nSec
Typical Junction Capacitance (Note 2)	C _J			17						pF
Typical Thermal Resistance (Note 3)	R _{θJA}			65						°C/W
Operating and Storage Temperature Range	T _J , T _{STG}			-65 to +150						°C

Note: 1. Test Conditions: IF = 0.5A, IR = 1.0A, I_{RR} = 0.25A

2. Measured at 1 MHz and applied reverse voltage of 4.0 volts

3. Thermal resistance from junction to ambient and from junction to lead length 0.375" (9.5mm) P.C.B. mounted

RATING AND CHARACTERISTIC CURVES (1U1 THRU 1U8)

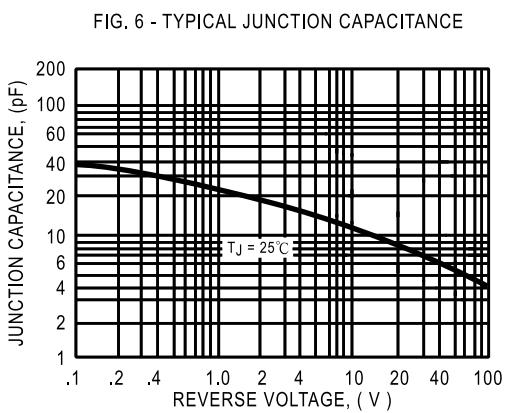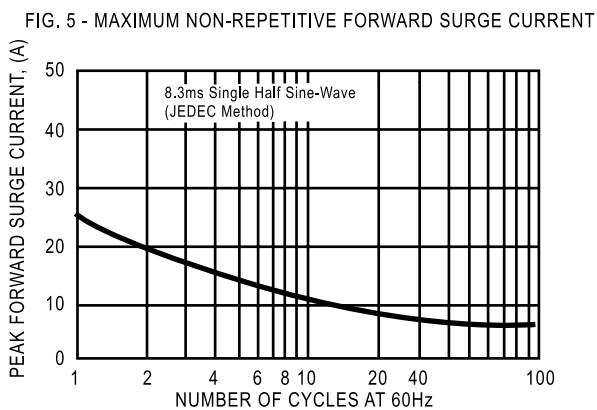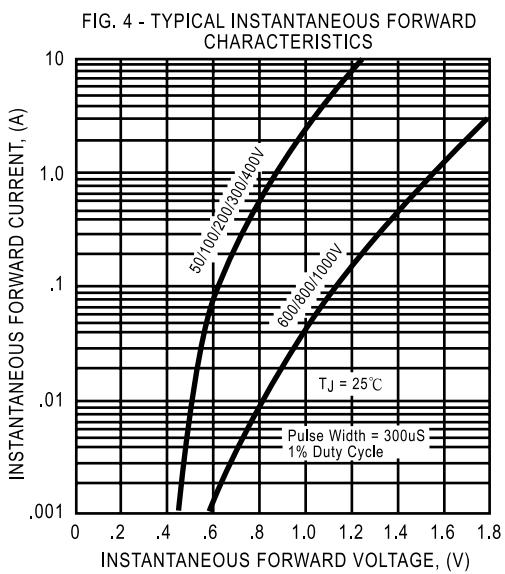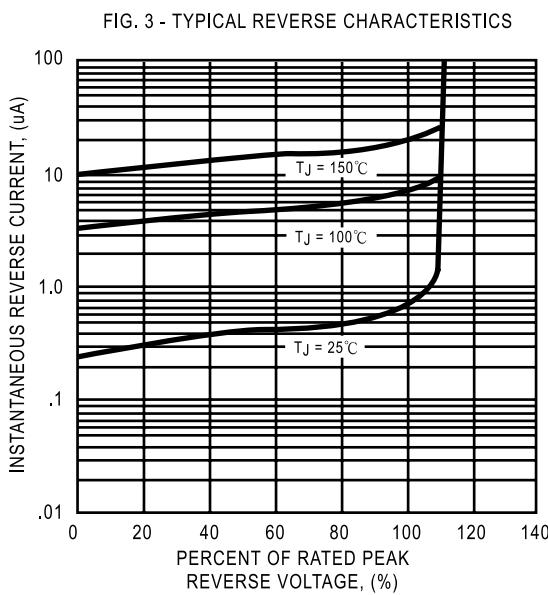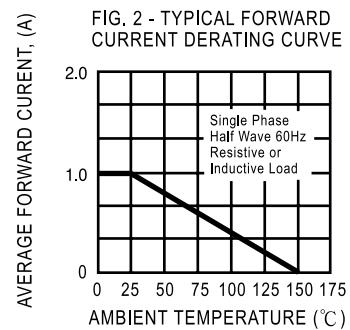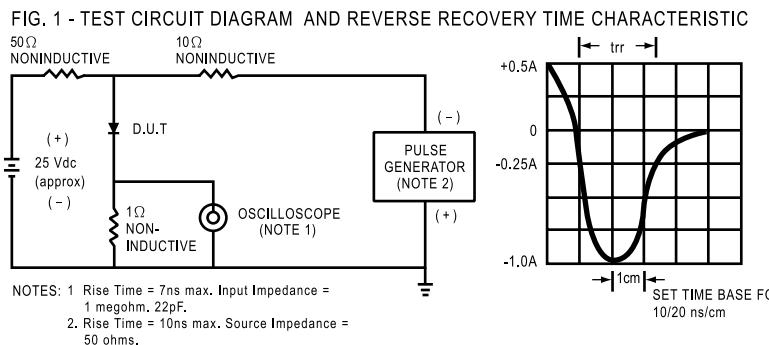

DC COMPONENTS CO., LTD.