



DC COMPONENTS CO., LTD.

DISCRETE SEMICONDUCTORS

DMBT2222A

TECHNICAL SPECIFICATIONS OF NPN EPITAXIAL PLANAR TRANSISTOR

Description


Designed for general purpose switching and amplifier applications.

Pinning

- 1 = Base
- 2 = Emitter
- 3 = Collector

Absolute Maximum Ratings (T_A=25°C)

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	V _{CB0}	75	V
Collector-Emitter Voltage	V _{CE0}	40	V
Emitter-Base Voltage	V _{EB0}	6	V
Collector Current	I _C	600	mA
Total Power Dissipation	P _D	225	mW
Junction Temperature	T _J	+150	°C
Storage Temperature	T _{STG}	-55 to +150	°C

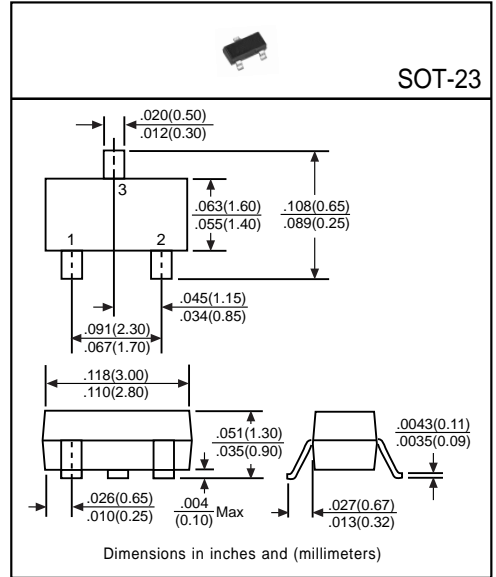

Electrical Characteristics

(Ratings at 25°C ambient temperature unless otherwise specified)

Characteristic	Symbol	Min	Typ	Max	Unit	Test Conditions
Collector-Base Breakdown Voltage	BV _{CB0}	75	-	-	V	I _C =10μA
Collector-Emitter Breakdown Voltage	BV _{CE0}	40	-	-	V	I _C =10mA
Emitter-Base Breakdown Voltage	BV _{EB0}	5	-	-	V	I _E =10μA
Collector Cutoff Current	I _{CBO}	-	-	10	nA	V _{CB} =60V
	I _{CEX}	-	-	10	nA	V _{CE} =60V, V _{EB(off)} =3V
Emitter Cutoff Current	I _{EBO}	-	-	10	nA	V _{EB} =3V
Collector-Emitter Saturation Voltage ⁽¹⁾	V _{CE(sat)1}	-	-	0.5	V	I _C =380mA, I _B =10mA
	V _{CE(sat)2}	-	-	1.0	V	I _C =500mA, I _B =50mA
Base-Emitter Saturation Voltage ⁽¹⁾	V _{BE(sat)1}	-	-	1.2	V	I _C =150mA, I _B =15mA
	V _{BE(sat)2}	-	-	2.0	V	I _C =500mA, I _B =50mA
DC Current Gain ⁽¹⁾	h _{FE1}	35	-	-	-	I _C =0.1mA, V _{CE} =10V
	h _{FE2}	50	-	-	-	I _C =1mA, V _{CE} =10V
	h _{FE3}	75	-	-	-	I _C =10mA, V _{CE} =10V
	h _{FE4}	100	-	300	-	I _C =150mA, V _{CE} =10V
	h _{FE5}	40	-	-	-	I _C =500mA, V _{CE} =10V
Transition Frequency	f _T	300	-	-	MHz	I _C =20mA, V _{CE} =20V, f=100MHz

(1) Pulse Test: Pulse Width ≤ 380μs, Duty Cycle ≤ 2%