



DC COMPONENTS CO., LTD.

DISCRETE SEMICONDUCTORS

DXTA42

TECHNICAL SPECIFICATIONS OF NPN EPITAXIAL PLANAR TRANSISTOR

Description


Designed for application as a video output to drive color CRT, or as a dialer circuit in electronics telephone.

Pinning

- 1 = Base
- 2 = Collector
- 3 = Emitter

Absolute Maximum Ratings(T_A=25°C)

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	V _{CBO}	300	V
Collector-Emitter Voltage	V _{CEO}	300	V
Emitter-Base Voltage	V _{EBO}	6	V
Collector Current	I _C	500	mA
Total Power Dissipation	P _D	1	W
Junction Temperature	T _J	+150	°C
Storage Temperature	T _{STG}	-55 to +150	°C

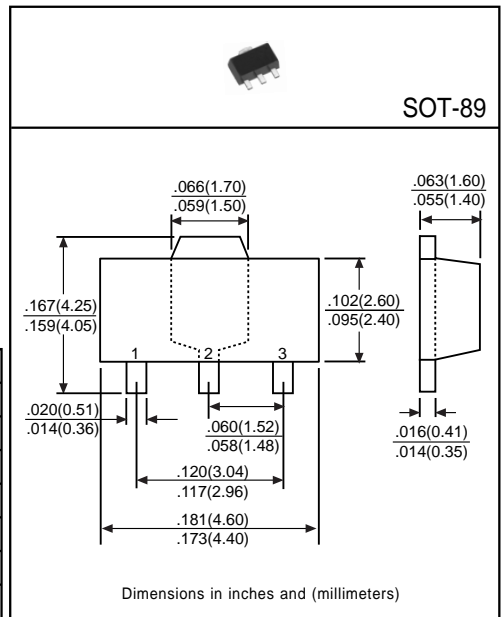

Electrical Characteristics

(Ratings at 25°C ambient temperature unless otherwise specified)

Characteristic	Symbol	Min	Typ	Max	Unit	Test Conditions
Collector-Base Breakdown Voltage	BV _{CBO}	300	-	-	V	I _C =100μA
Collector-Emitter Breakdown Voltage	BV _{CEO}	300	-	-	V	I _C =1mA
Emitter-Base Breakdown Voltage	BV _{EBO}	6	-	-	V	I _E =10μA
Collector Cutoff Current	I _{CBO}	-	-	100	nA	V _{CB} =260V
Emitter Cutoff Current	I _{EBO}	-	-	100	nA	V _{EB} =6V
Collector-Emitter Saturation Voltage ⁽¹⁾	V _{CE(sat)}	-	-	0.5	V	I _C =20mA, I _B =2mA
Base-Emitter Saturation Voltage ⁽¹⁾	V _{BE(sat)}	-	-	0.9	V	I _C =20mA, I _B =2mA
DC Current Gain ⁽¹⁾	h _{FE1}	25	-	-	-	I _C =1mA, V _{CE} =10V
	h _{FE2}	40	-	-	-	I _C =10mA, V _{CE} =10V
	h _{FE3}	40	-	-	-	I _C =30mA, V _{CE} =10V
Transition Frequency	f _T	50	-	-	MHz	V _{CE} =20V, I _C =10mA, f=100MHz
Output Capacitance	C _{ob}	-	3	-	pF	V _{CB} =20V

(1)Pulse Test: Pulse Width ≤ 380μs, Duty Cycle ≤ 2%