



DC COMPONENTS CO., LTD.
RECTIFIER SPECIALISTS

**SR3020
THRU
SR3060**

TECHNICAL SPECIFICATIONS OF SCHOTTKY BARRIER RECTIFIER
VOLTAGE RANGE - 20 to 60 Volts **CURRENT - 30 Amperes**

FEATURES

- * Low switching noise
- * Low forward voltage drop
- * Low thermal resistance
- * High current capability
- * High switching capability
- * High surge capability
- * High reliability


MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Lead: MIL-STD-202E, Method 208 guaranteed
- * Polarity: As marked
- * Mounting position: Any
- * Weight: 5.60 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS
Rating at 25°C ambient temperature unless otherwise specified
Single phase, half wave 60 HZ, resistive or inductive load.
For capacitive load, derate current by 20%.



TO-3P

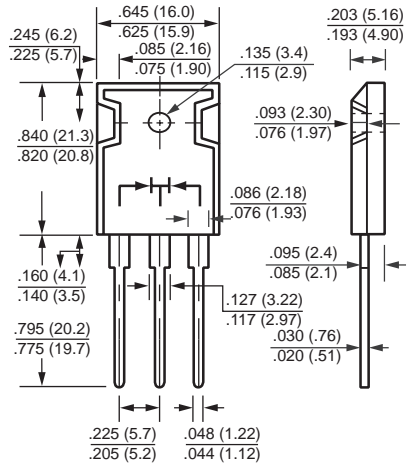

Dimensions in inches and (millimeters)

	SYMBOL	SR3020	SR3030	SR3040	SR3050	SR3060	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	20	30	40	50	60	Volts
Maximum RMS Voltage	V _{RMS}	14	21	28	35	42	Volts
Maximum DC Blocking Voltage	V _{DC}	20	30	40	50	60	Volts
Maximum Average Forward Rectified Current at Derating Case Temperature	I _O	30					Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	250					Amps
Maximum Instantaneous Forward Voltage at 15.0A DC	V	.65			.75		Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage	@T _C = 25°C	2					mAmps
	@T _C = 100°C	100					mAmps
Typical Thermal Resistance (Note 1)	R _{θJC}	1.4					°C/W
Operating Temperature Range	T _J	-55 to + 150					°C
Storage Temperature Range	T _{STG}	-55 to + 150					°C

NOTES : 1. Thermal Resistance Junction to Case per leg.
2. Suffix "A" = Common Anode.

RATING AND CHARACTERISTIC CURVES (SR3020 THRU SR3060)

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

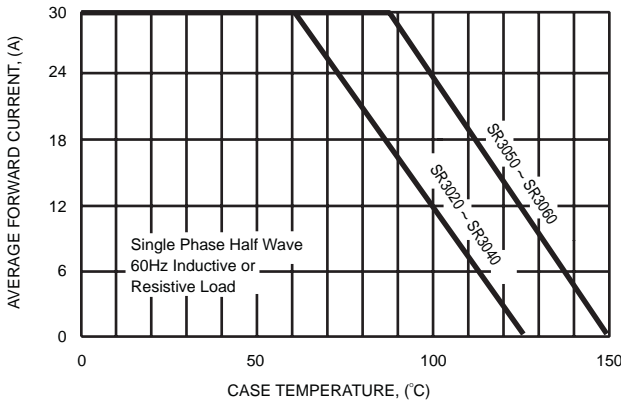


FIG. 3 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

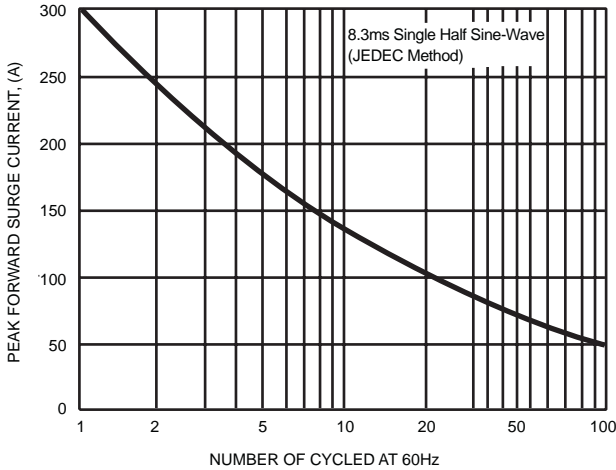


FIG. 4 - TYPICAL JUNCTION CAPACITANCE

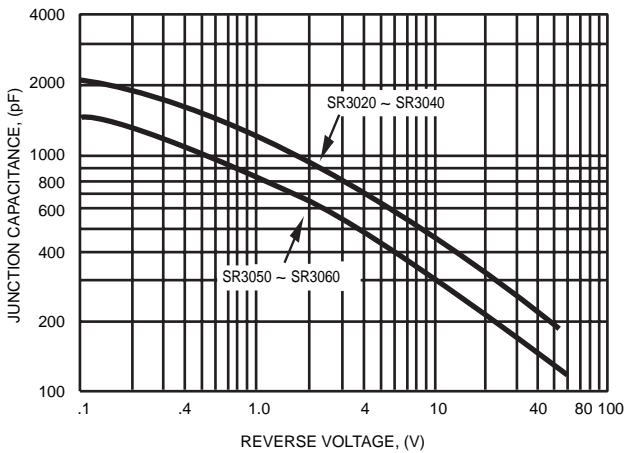


FIG. 2 - TYPICAL REVERSE CHARACTERISTICS


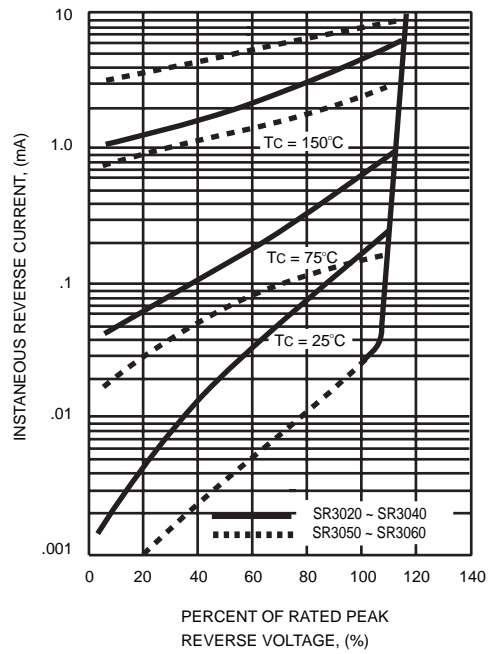


FIG. 5 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

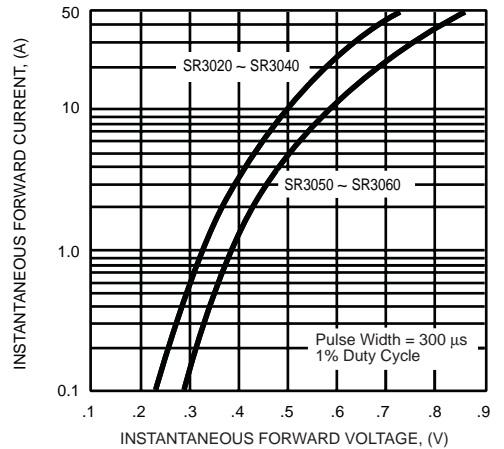

Disclaimer

Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold *DC COMPONENTS* harmless against all damages.

DC COMPONENTS disclaims any and all liability arising out of the application or use of any product, including consequential or incidental damages. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

DC COMPONENTS reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein, and disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Unless otherwise in writing, *DC COMPONENTS* products are intended for use as general electronic components in standard applications (eg: Consumer electronic, Computer equipment, Office equipment, etc.), and not recommended for use in a high specific application where a failure or malfunction of the device could result in human injury or death (eg: Aerospace equipment, Submarine cables, Combustion equipment, Safety devices, Life support systems, etc.)

Customers using or selling *DC COMPONENTS* products not expressly indicated for use in such applications do so at their own risk. If customer intended to use *DC COMPONENTS* standard quality grade devices for applications not envisioned by *DC COMPONENTS*, please contact our sales representatives in advance.



DC COMPONENTS CO., LTD.