



DC COMPONENTS CO., LTD.
DISCRETE SEMICONDUCTORS

BC857BW

TECHNICAL SPECIFICATIONS OF PNP EPITAXIAL PLANAR TRANSISTOR

Description


Designed for switching and AF amplifier amplification suitable for automatic insertion in thick and thin-film circuits.

Pinning

- 1 = Base
- 2 = Emitter
- 3 = Collector

Absolute Maximum Ratings (TA=25°C)

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	V _{CB0}	-50	V
Collector-Emitter Voltage	V _{CEO}	-45	V
Emitter-Base Voltage	V _{EBO}	-5	V
Collector Current	I _C	-100	mA
Total Power Dissipation	P _D	150	mW
Junction Temperature	T _J	+150	°C
Storage Temperature	T _{STG}	-55 to +150	°C

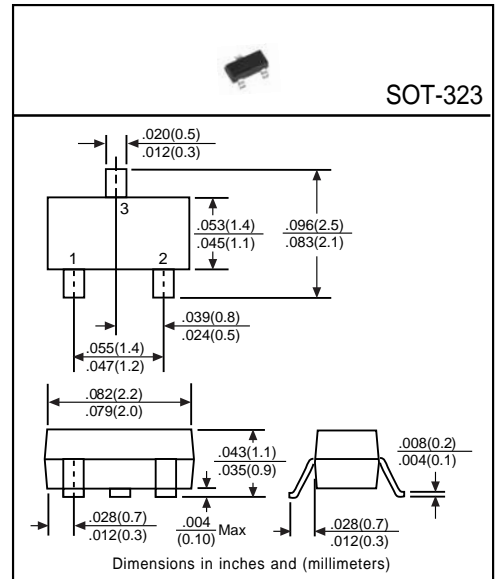

Electrical Characteristics

(Ratings at 25°C ambient temperature unless otherwise specified)

Characteristic	Symbol	Min	Typ	Max	Unit	Test Conditions
Collector-Base Breakdown Voltage	BV _{CB0}	-50	-	-	V	I _C =-10μA
Collector-Emitter Breakdown Voltage	BV _{CEO}	-45	-	-	V	I _C =-1mA
Emitter-Base Breakdown Voltage	BV _{EBO}	-5	-	-	V	I _E =-1μA
Collector Cutoff Current	I _{CBO}	-	-	-15	nA	V _{CB} =-30V
Collector-Emitter Saturation Voltage ⁽¹⁾	V _{CE(sat)1}	-	-90	-300	mV	I _C =-10mA, I _B =-0.5mA
	V _{CE(sat)2}	-	-250	-650	mV	I _C =-100mA, I _B =-5mA
Base-Emitter Saturation Voltage ⁽¹⁾	V _{BE(sat)1}	-	-700	-	mV	I _C =-10mA, I _B =-0.5mA
	V _{BE(sat)2}	-	-900	-	mV	I _C =-100mA, I _B =-5mA
Base-Emitter On Voltage	V _{BE(on)1}	-600	-	-750	mV	I _C =-2mA, V _{CE} =-5V
	V _{BE(on)2}	-	-	-820	mV	I _C =-10mA, V _{CE} =-5V
DC Current Gain ⁽¹⁾	h _{FE}	110	-	800	-	I _C =-2mA, V _{CE} =-5V
Transition Frequency	f _T	-	150	-	MHz	I _C =-10mA, V _{CE} =-5V
Output Capacitance	C _{ob}	-	-	6	pF	V _{CB} =-10V, f=1MHz, I _E =0


(1) Pulse Test: Pulse Width ≤ 380μs, Duty Cycle ≤ 2%

Classification of h_{FE}


Rank	A	B	C
Range	110~220	200~450	420~800

Electrical Characteristic Curves


Typical Output Characteristics

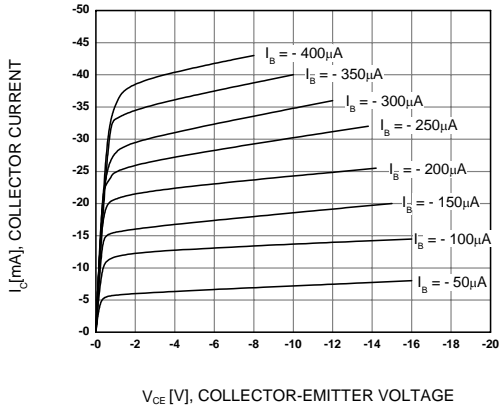

DC Current Gain

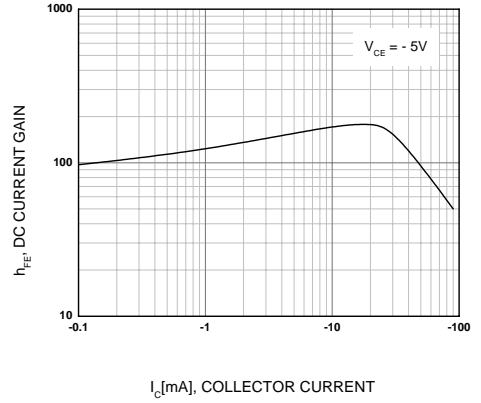

Collector-Emitter Saturation Voltage & Base-Emitter Saturation Voltage

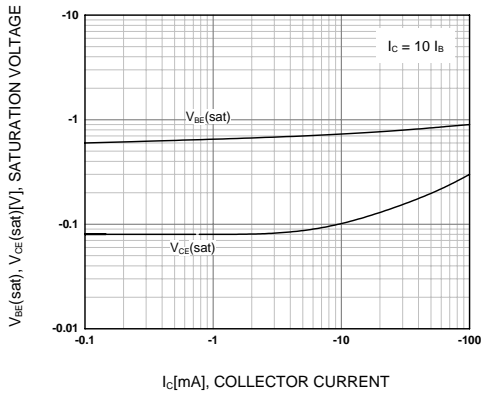

Current Gain-Bandwidth Product

