



DC COMPONENTS CO., LTD.
RECTIFIER SPECIALISTS

**SMAF4728A
THRU
SMAF4777A**

TECHNICAL SPECIFICATIONS OF SURFACE MOUNT ZENER DIODES

VOLTAGE RANGE - 3.3 to 330 Volts

POWER - 1.0 Watt

FEATURES


- * Voltage Range: 3.3V to 330V
- * Low zener impedance
- * Low regulation factor
- * High reliability
- * Glass passivated junction

MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- * Polarity: As marked
- * Mounting position: Any
- * Weight: 0.064 gram



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

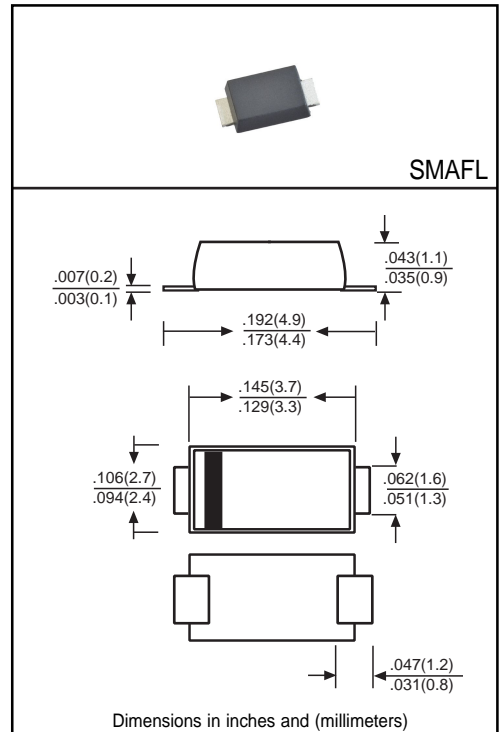

	SYMBOL	VALUE	UNITS
Maximum Power Dissipation @TL=75°C (Note 1)	Ptot	1.0	W
Maximum forward voltage at IF=200mA	VF	1.2	Volts
Maximum Thermal Resistance Junction to Ambient Air	RθJA	170	°C/W
Junction Temperature Range	TJ	-55 to +150	°C
Storage Temperature Range	TSTG	-55 to +150	°C

NOTE: Suffix "A" indicates Zener Voltage Tolerance ± 5%

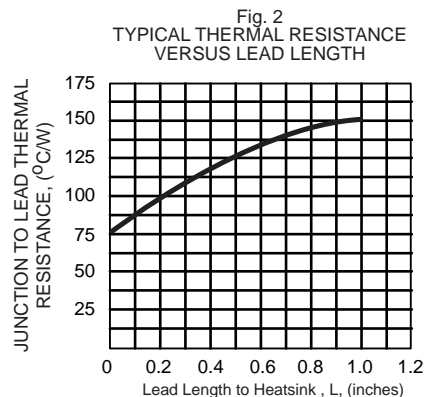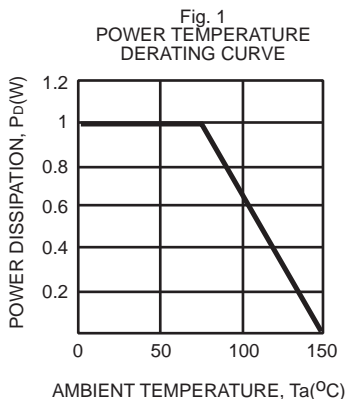

RATING AND CHARACTERISTIC CURVES (SMAF4728A THRU SMAF4777A)

TYPE	Nominal Zener Voltage	Zener Test Current	Maximum Zener Impedance		IZK	Maximum Reverse Leakage Current	
	VZ@IZT	IZT	ZZT@IZT	ZZT@IZK		IR	@VR
	Volts	mA	Ohms	Ohms		μA	Volts
SMAF4728A	3.3	76	10	400	1.0	100	1.0
SMAF4729A	3.6	69	10	400	1.0	100	1.0
SMAF4730A	3.9	64	9.0	400	1.0	50	1.0
SMAF4731A	4.3	58	9.0	400	1.0	10	1.0
SMAF4732A	4.7	53	8.0	500	1.0	10	1.0
SMAF4733A	5.1	49	7.0	550	1.0	10	1.0
SMAF4734A	5.6	45	5.0	600	1.0	10	2.0
SMAF4735A	6.2	41	2.0	700	1.0	10	3.0
SMAF4736A	6.8	37	3.5	700	1.0	5.0	4.0
SMAF4737A	7.5	34	4.0	700	0.5	5.0	5.0
SMAF4738A	8.2	31	4.5	700	0.5	5.0	6.0
SMAF4739A	9.1	28	5.0	700	0.5	0.5	7.0
SMAF4740A	10	25	7.0	700	0.25	0.5	7.6
SMAF4741A	11	23	8.0	700	0.25	0.1	8.4
SMAF4742A	12	21	9.0	700	0.25	0.1	9.1
SMAF4743A	13	19	10	700	0.25	0.1	9.9
SMAF4744A	15	17	14	700	0.25	0.1	11.4
SMAF4745A	16	15.5	16	700	0.25	0.1	12.2
SMAF4746A	18	14	20	750	0.25	0.1	13.7
SMAF4747A	20	12.5	22	750	0.25	0.1	15.2
SMAF4748A	22	11.5	23	750	0.25	0.1	16.7
SMAF4749A	24	10.5	25	750	0.25	0.1	18.2
SMAF4750A	27	9.5	35	750	0.25	0.1	20.6
SMAF4751A	30	8.5	40	1000	0.25	0.1	22.8
SMAF4752A	33	7.5	45	1000	0.25	0.1	25.1
SMAF4753A	36	7.0	50	1000	0.25	0.1	27.4
SMAF4754A	39	6.5	60	1000	0.25	0.1	29.7
SMAF4755A	43	6.0	70	1500	0.25	0.1	32.7
SMAF4756A	47	5.5	80	1500	0.25	0.1	35.8
SMAF4757A	51	5.0	95	1500	0.25	0.1	38.8
SMAF4758A	56	4.5	110	2000	0.25	0.1	42.6
SMAF4759A	62	4.0	125	2000	0.25	0.1	47.1
SMAF4760A	68	3.7	150	2000	0.25	0.1	51.7
SMAF4761A	75	3.3	175	2000	0.25	0.1	56.0
SMAF4762A	82	3.0	200	2000	0.25	0.1	62.2
SMAF4763A	91	2.8	250	2000	0.25	0.1	69.2
SMAF4764A	100	2.5	350	2000	0.25	0.1	76.0
SMAF4765A	110	2.3	450	4000	0.25	0.1	83.6
SMAF4766A	120	2.0	550	4500	0.25	0.1	91.2
SMAF4767A	130	1.9	700	5000	0.25	0.1	98.8
SMAF4768A	150	1.7	1000	6000	0.25	0.1	114.0
SMAF4769A	160	1.6	1100	6500	0.25	0.1	121.6
SMAF4770A	180	1.4	1200	7000	0.25	0.1	136.8
SMAF4771A	200	1.2	1900	9990	0.25	0.1	152.0
SMAF4772A	220	1.0	1600	8000	0.25	0.1	167.2
SMAF4773A	240	0.9	1800	8500	0.25	0.1	182.4
SMAF4774A	250	0.9	2000	9000	0.25	0.1	190.4
SMAF4775A	270	0.8	2100	9000	0.25	0.1	205.0
SMAF4776A	300	0.8	2300	9500	0.25	0.1	228.0
SMAF4777A	330	0.7	2500	9500	0.25	0.1	250.2

NOTE: Standard Zener Voltage Tolerance $\pm 5\%$

Disclaimer

Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold *DC COMPONENTS* harmless against all damages.

DC COMPONENTS disclaims any and all liability arising out of the application or use of any product, including consequential or incidental damages. Statement regarding the suitability of products for certain types of applications are based on *DC COMPONENTS*'s knowledge of typical requirements that are often placed on *DC COMPONENTS* products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

DC COMPONENTS reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein, and disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product. Parameters provided in datasheets and specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify *DC COMPONENTS*'s terms and conditions of purchase, including but not limited to the warranty expressed therein.

Unless otherwise in writing, *DC COMPONENTS* products are intended for use as general electronic components in standard applications (eg: Consumer electronic, Computer equipment, Office equipment, etc.), and not recommended for use in a high specific application where a failure or malfunction of the device could result in human injury or death (eg: Aerospace equipment, Submarine cables, Combustion equipment, Safety devices, Life support systems, etc.)

Customers using or selling *DC COMPONENTS* products not expressly indicated for use in such applications do so at their own risk. If customer intended to use *DC COMPONENTS* standard quality grade devices for applications not envisioned by *DC COMPONENTS*, please contact our sales representatives in advance.



DC COMPONENTS CO., LTD.