



DC COMPONENTS CO., LTD.
RECTIFIER SPECIALISTS

MMSZ5221BS
THRU
MMSZ5259BS

TECHNICAL SPECIFICATIONS OF SURFACE MOUNT SILICON ZENER DIODES

FEATURES

- * Planar Die construction
- * Zener Voltages from 2.4V - 39V
- * 500mW Power Dissipation
- * Ideally Suited for Automated Assembly Processes

MECHANICAL DATA


- * Case: Molded Plastic
- * Terminals: Solder plated, solderable per MIL-STD-202, Method 208
- * Polarity: See Diagram Below
- * Mounting position: Any
- * Weight: 0.008 gram Approx.

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.



SOD-323



Dimensions in inches(millimeters)

	SYMBOL	VALUE	UNITS
Zener Current see Table "Characteristics"			
Power Dissipation (Notes 1) at Tamb=25°C	Ptot	500	mW
Peak Forward Surge Current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) (Notes 2)	IFSM	4.0	Amps
Maximum Forward Voltage at IF=100mA	VF	1.2	Volts
Operating and Storage Temperature	TJ, Tstg	-55 to + 150	°C

Notes: 1. Mounted on 5.0mm² (.013mm thick) land areas.

2. Measured on 8.3ms, single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum.

RATING AND CHARACTERISTIC CURVES (MMSZ5221BS THRU MMSZ5259BS)



TYPE	Nominal Zener Voltage $V_Z@I_ZT$	Zener Test Current I_{ZT}	Maximum Zener Impedance		I_{ZK}	Maximum Reverse Leakage Current		Typical Temperature Coefficient	Max. Zener Current $I_{ZM}@T_A$	Marking Code
	Volts	mA	$Z_{ZT}@I_{ZT}$	$Z_{ZT}@I_{ZK}$		$I_R @ V_R$				
			Ohms	Ohms	μA	Volts	% / °C	mA		
MMSZ5221BS	2.4	20	30	1200	0.25	100	1.0	-0.070	188	C1
MMSZ5222BS	2.5	20	30	1250	0.25	100	1.0	-0.065	180	C2
MMSZ5223BS	2.7	20	30	1300	0.25	75	1.0	-0.060	167	C3
MMSZ5225BS	3.0	20	30	1600	0.25	50	1.0	-0.055	150	C5
MMSZ5226BS	3.3	20	28	1600	0.25	25	1.0	± 0.030	136	D1
MMSZ5227BS	3.6	20	24	1700	0.25	15	1.0	± 0.030	126	D2
MMSZ5228BS	3.9	20	23	1900	0.25	10	1.0	+0.038	115	D3
MMSZ5229BS	4.3	20	22	2000	0.25	5	1.0	+0.038	106	D4
MMSZ5230BS	4.7	20	19	1900	0.25	5	2.0	+0.045	97	D5
MMSZ5231BS	5.1	20	17	1600	0.25	5	2.0	+0.050	89	E1
MMSZ5232BS	5.6	20	11	1600	0.25	5	3.0	+0.058	81	E2
MMSZ5233BS	6.0	20	9	1600	0.25	5	3.5	+0.060	76	E3
MMSZ5234BS	6.2	20	7	1000	0.25	5	4.0	+0.062	73	E4
MMSZ5235BS	6.8	20	5	750	0.25	3	5.0	+0.065	67	E5
MMSZ5236BS	7.5	20	6	500	0.25	3	6.0	+0.068	61	F1
MMSZ5237BS	8.2	20	8	500	0.25	3	6.0	+0.075	55	F2
MMSZ5238BS	8.7	20	9	600	0.25	3	6.5	+0.075	52	F3
MMSZ5239BS	9.1	20	10	600	0.25	3	6.5	+0.076	50	F4
MMSZ5240BS	10	20	17	600	0.25	3	8.0	+0.077	45	F5
MMSZ5241BS	11	20	22	600	0.25	3	8.4	+0.079	41	H1
MMSZ5242BS	12	20	30	600	0.25	2	9.1	+0.082	38	H2
MMSZ5243BS	13	9.5	13	600	0.25	1	9.9	+0.082	35	H3
MMSZ5244BS	14	9.0	14	600	0.25	0.5	10	+0.082	32	H4
MMSZ5245BS	15	8.5	16	600	0.25	0.1	11	+0.083	30	H5
MMSZ5246BS	16	7.8	17	600	0.25	0.1	12	+0.084	28	J1
MMSZ5247BS	17	7.4	19	600	0.25	0.1	13	+0.084	27	J2
MMSZ5248BS	18	7.0	21	600	0.25	0.1	14	+0.085	25	J3
MMSZ5249BS	19	6.6	23	600	0.25	0.1	14	+0.085	24	J4
MMSZ5250BS	20	6.2	25	600	0.25	0.1	15	+0.086	23	J5
MMSZ5251BS	22	5.6	29	600	0.25	0.1	17	+0.086	21	K1
MMSZ5252BS	24	5.2	33	600	0.25	0.1	18	+0.087	19.1	K2
MMSZ5253BS	25	5.0	36	600	0.25	0.1	19	+0.087	18.2	K3
MMSZ5254BS	27	4.6	41	600	0.25	0.1	21	+0.087	16.8	K4
MMSZ5255BS	28	4.5	44	600	0.25	0.1	21	+0.089	16.2	K5
MMSZ5256BS	30	4.2	49	600	0.25	0.1	23	+0.090	15.1	M1
MMSZ5257BS	33	3.8	58	700	0.25	0.1	25	+0.091	13.8	M2
MMSZ5258BS	36	3.4	70	700	0.25	0.1	27	+0.091	12.6	M3
MMSZ5259BS	39	3.2	80	800	0.25	0.1	30	+0.092	11.6	M4

NOTE: Standard Zener Voltage Tolerance $\pm 5\%$

Breakdown characteristics

MMSZ52-SERIES

changes in the power dissipation due to the ambient temperature.

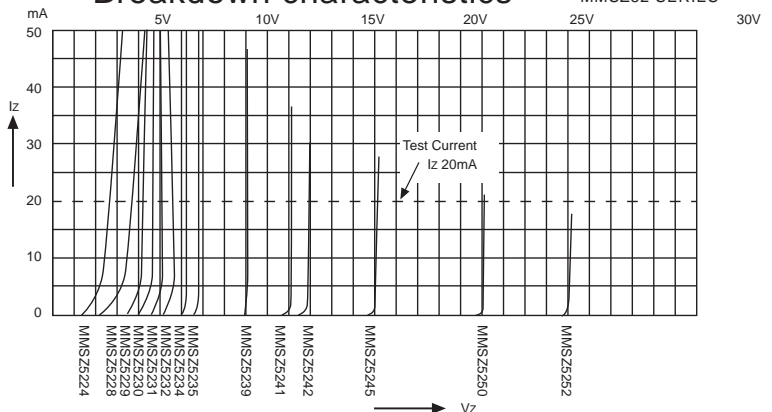

DC COMPONENTS CO., LTD.