



DC COMPONENTS CO., LTD.

RECTIFIER SPECIALISTS

**6A05G
THRU
6A10G**

TECHNICAL SPECIFICATIONS OF GLASS PASSIVATED RECTIFIER

VOLTAGE RANGE - 50 to 1000 Volts


CURRENT - 6.0 Amperes

FEATURES


- * Low cost
- * Low leakage
- * Low forward voltage drop
- * High current capability
- * High surge current capability

MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Lead: MIL-STD-202E, Method 208 guaranteed
- * Polarity: Color band denotes cathode end
- * Mounting position: Any
- * Weight: 2.08 grams

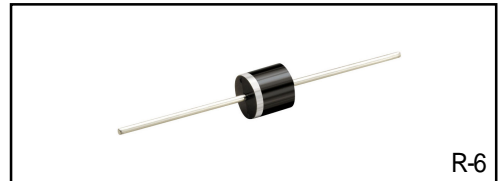

R-6

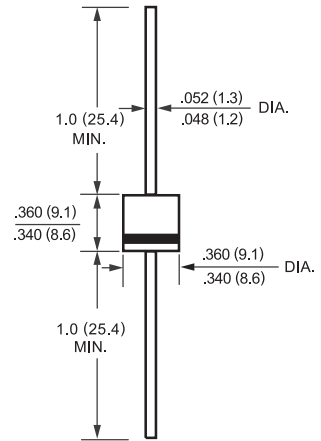

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

	SYMBOL	6A05G	6A1G	6A2G	6A4G	6A6G	6A8G	6A10G	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current at T _A = 60°C	I _O	6.0							Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}					400			Amps
Maximum Instantaneous Forward Voltage at 6.0A DC	V _F					1.1			Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage	I _R					10			uAmps
						500			
Maximum Full Load Reverse Current Average Full Cycle .375" (9.5mm) lead length at T _L = 75°C						50			uAmps
Typical Junction Capacitance (Note)	C _J					150			pF
Typical Thermal Resistance	R _{θJA}					10			°C/W
Operating and Storage Temperature Range	T _J , T _{STG}					-65 to + 175			°C

NOTES : Measured at 1 MHz and applied reverse voltage of 4.0 volts

RATING AND CHARACTERISTIC CURVES (6A05G THRU 6A10G)

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

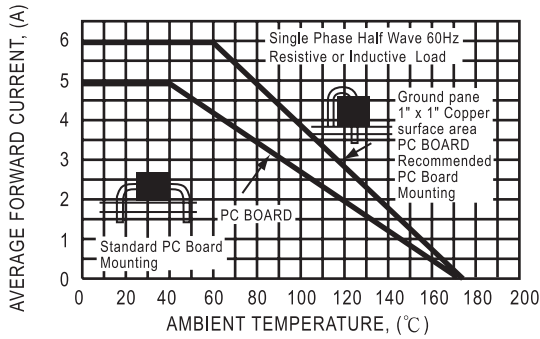


FIG. 2 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

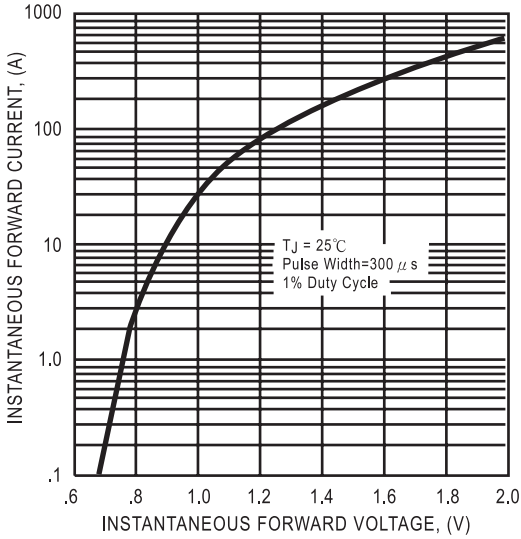


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

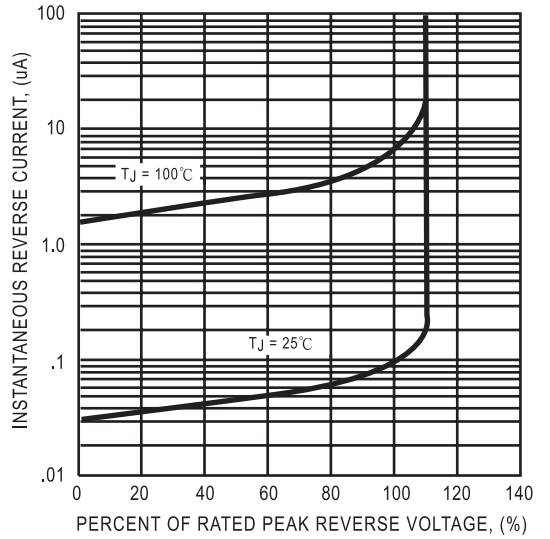


FIG. 3 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

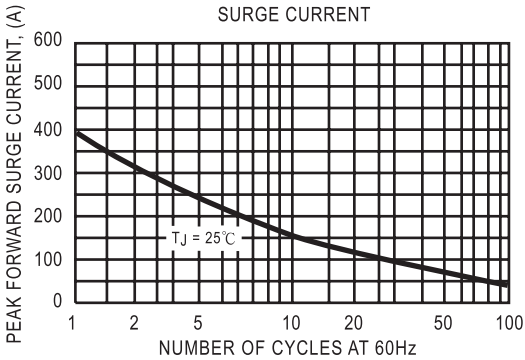


FIG. 5 - TYPICAL THERMAL RESISTANCE VS LEAD LENGTH

